




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G07F 7/10		A1	(11) International Publication Number: WO 00/68902
			(43) International Publication Date: 16 November 2000 (16.11.00)
(21) International Application Number: PCT/US00/12932 (22) International Filing Date: 10 May 2000 (10.05.00) (30) Priority Data: 60/133,600 11 May 1999 (11.05.99) US (71) Applicant: MICROSOFT CORPORATION [US/US]; One Microsoft Way, Redmond, WA 98052 (US). (72) Inventors: ODINAK, Gilad; 12342 NE 26th Place, Bellevue, WA 98005 (US). MILSTEIN, David; 6610 159th Avenue NE, Redmond, WA 98052 (US). PERLIN, Eric, C.; 845 Bellevue Place East, Apt. 302, Seattle, WA 98102 (US). DEO, Vinay; 15606 NE 40th Street #G225, Redmond, WA 98052 (US). GUTHERY, Scott, B.; 80 Manamet Road, Newton, MA 02459-1415 (US). (74) Agents: BANOWSKY, James, R. et al.; 421 West Riverside Avenue, Suite 500, Spokane, WA 99201 (US).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD AND APPARATUS FOR SHARING DATA FILES AMONG RUNTIME ENVIRONMENT APPLETS IN AN INTEGRATED CIRCUIT CARD

(57) Abstract

An integrated circuit card is presented comprising a storage device having stored thereon one or more code files and one or more data files, and control logic. The control logic implements an ICC runtime environment that executes an applet in response to a command identifying both a code file and data file received from a host system.

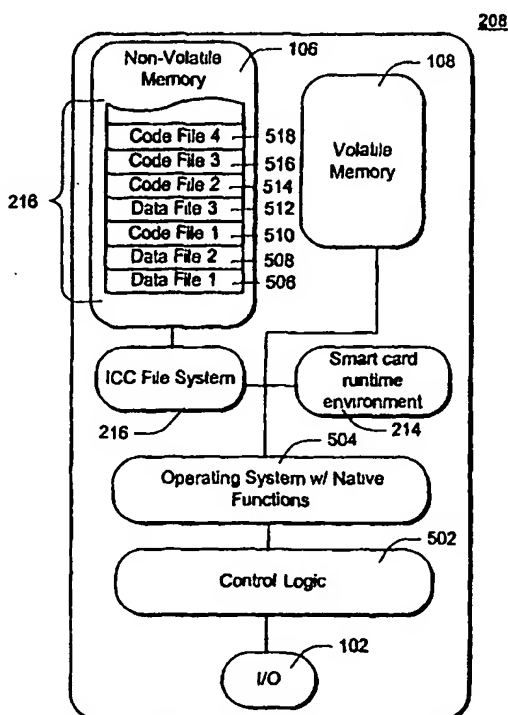

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR SHARING DATA FILES AMONG RUNTIME
ENVIRONMENT APPLETS IN AN INTEGRATED CIRCUIT CARD

5 TECHNICAL FIELD

This invention generally relates to integrated circuit cards and, more specifically, to a method and apparatus for sharing data files among runtime environment applets in an integrated circuit card (ICC).

10 BACKGROUND OF THE INVENTION

Today there is increasing use of integrated circuit cards, colloquially referred to as "smart cards", in place of, or in addition to, conventional magnetic stripe cards ("mag cards"). A smart card is a thin card embedded with a memory device (volatile and/or non-volatile) and associated programmable or non-programmable
15 logic. Unlike the mag card that merely stores "static" information (e.g., a credit card account number), a smart card can add, delete and otherwise manipulate information stored on the card. Accordingly, smart cards are capable of storing and executing applications to carry out one or more functions within a smart card.

A smart card is often referred to as a "closed" system because, for security
20 purposes, a smart card is purposefully designed to not expose its memory, intermediate system states or data and address bus information to external devices. To do so would render it susceptible to unauthorized access (hacking) and fraud. While its closed nature is useful for secure applications such as banking transactions, it makes it difficult to utilize prior art smart cards for development
25 purposes. It is to be appreciated that application development often requires access to memory or bus values, or system state information during intermediate processing steps, access that has been specifically designed out of the smart card.

Another encumbrance to the smart card application designer is the limited resources of the smart card. That is, due to the physical and processing constraints placed on the smart card, prior art smart cards do not enjoy any dedicated debug facilities. Aside from the limited processing and memory attributes of a smart card, 5 a smart card typically has but a single, bi-directional input/output (I/O) port. The communication bandwidth of this single I/O port is typically consumed to support execution of the smart card application itself, leaving little to no communication bandwidth to support debug features. Thus, application development using a smart card itself is virtually impossible. Consequently the development of applications 10 for a smart card currently requires the use of an in-circuit emulator (ICE) and an associated, often proprietary software development application.

As a result of the limited processing and memory capability of the smart card, and the cost of development, each smart card is typically developed to support a few functions. The smart card functionality is typically embodied as a couple of 15 stand-alone runtime environment applets, stored within a non-volatile memory of the smart card, and selectively invoked by a host system. To better illustrate this architecture, a block diagram of a typical prior art smart card system architecture is presented with reference to Fig. 1.

As shown, from a hardware perspective, smart card 100 is comprised of an 20 input/output (I/O) interface 102, control logic 104, non-volatile memory 106 and volatile memory 108, coupled as shown. Control logic 104 supports an operating system with native functions 110 and a runtime environment (RTE) 112, which executes runtime environment applets 114A and 114B accessed from non-volatile memory 106. The operating system 110 and RTE 112 are typically invoked when 25 the smart card is introduced to a host system, e.g., a card reader, which provides power to smart card 100.

Because of the limited memory and processing capability of the smart card, the runtime environment 112 is typically optimized for the functions it performs, i.e., to implement the functionality embedded within applets 114. Moreover, storage of the applets themselves are optimized, i.e., the bytecode and data for the
5 applets are compiled and stored as a single executable entity within one or more segments of non-volatile memory, as shown.

It should be appreciated that while the prior art runtime environment and applets were optimized to preserve the processing and memory capabilities of the smart card, they do not provide a flexible environment for, say, smart card applet
10 development. One of the drawbacks of the self-contained applets typical of the prior art is that in order to change the functionality of an applet, the data must be replaced as well. That is, the code and data of the applet are inextricably tied together.

In addition to limiting the flexibility of the applets, compiling the code and
15 data into a common file may, in certain circumstances, waste memory resources. That is, if two applets required the same data, the prior art dictates that two applet files, each with the same data, be stored in the non-volatile memory of the smart card. By eliminating this needless duplication, memory resources may be freed to extend the functional capability of the smart card.

20 Thus, a method and apparatus for sharing data files among runtime environment applets is required, unencumbered by the limitations commonly associated with the prior art. One such solution is presented below.

SUMMARY OF THE INVENTION

This invention concerns an integrated circuit card (ICC), such as a smart card and, more particularly, to a method and apparatus for sharing data files among runtime environment applets in an integrated circuit card.

In accordance with a first aspect of the invention, an integrated circuit card is presented comprising a storage device having stored thereon one or more code files and one or more data files, and control logic. When the ICC is inserted into a card reader, the control logic implements an ICC runtime environment that executes an applet in response to a command identifying a code file and a data file received from a host system. It is to be appreciated that an ICC incorporating the teachings of the present invention stores and executes discrete code and data files, enabling runtime environment applets to share data files between discrete code files, according to one aspect of the invention.

The runtime environment applets, with discrete code and data files are developed using an innovative application development agent that includes a compiler and a file system builder. In addition to the typical function of translating source code into executable bytecodes, the compiler incorporating the teachings of the present invention distinguishes the executable bytecode from data, storing the executable bytecodes in a code file and the data in a data file.

The file system builder receives a description of a file system to be implemented on the ICC and generates a binary image of the file system. According to one embodiment of the invention, the received description is an ordered series of script commands that describe and build the file system. The binary image of the file system is then loaded (or masked) in the non-volatile memory of the ICC.

In this regard, the present invention also consists of an ICC file system, responsive to an innovative command set which enables a user (or host system

program) to add, delete, modify and execute discrete code and data files stored in non-volatile memory of the ICC. It will be appreciated that the innovative ICC file system enables a user (or host system) to modify the functionality of an ICC (i.e., add, delete or modify code files) without disrupting the data files. Similarly, the

5 ICC file system facilitates modification of ICC data stores without modification to an ICC functionality.

Thus, it is to be appreciated that an ICC application development system incorporating the innovative compiler and file system builder represents a significant advancement in smart card application development and deployment.

10 By separating an applet into distinct code files and data files, the present invention facilitates a much more flexible runtime environment, while reducing the amount of memory required to store otherwise redundant information.

BRIEF DESCRIPTION OF THE DRAWINGS

15 **Fig. 1** is a block diagram of a system architecture for a prior art integrated circuit card;

Fig. 2 is a block diagram of an example data network including an integrated circuit card incorporating the teachings of the present invention;

Fig. 3 is a block diagram of an example computer system including an

20 innovative integrated circuit card application development agent, according to one aspect of the present invention;

Fig. 4 is a block diagram of an example development agent, in accordance with the teachings of the present invention;

Fig. 5 is a block diagram of an example integrated circuit card including a

25 file system and discrete code files and data files, according to the teachings of the present invention;

Fig. 6 is a block diagram of an example application protocol data unit (APDU) suitable for use in accordance with the present invention;

Fig. 7 is a flow chart for compiling a runtime environment applet, in accordance with the teachings of the present invention;

5 Fig. 8 is a flow chart for building a file system for use on an integrated circuit card, in accordance with the teachings of the present invention;

Fig. 9 is a flow chart illustrating the method steps of executing a runtime environment applet on the innovative ICC of Fig. 5, in accordance with the teachings of the present invention; and

10 Fig. 10 is a block diagram of an example storage medium having stored thereon a plurality of executable instructions including instructions which, when executed, implement the development agent of the present invention, according to an alternate embodiment of the present invention.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Example Network

Fig. 2 illustrates an example data network 200 including an integrated circuit card 208 incorporating the teachings of the present invention. As shown, network 200 includes a host system 202 coupled to ICC 208 via communication medium 204 and card reader 206. Host system 202 includes an operating system 210 and one or more host applications 212. The innovative ICC 208 is shown comprising a runtime environment 214, a file system 216 and a storage medium having stored thereon one or more code files and one or more discrete data files (cumulatively referenced as 218). The communication medium 108 is intended to represent any of
25 a number of typical communication links including, but not limited to, a proprietary

data bus, an industry standard data bus, a local area network (LAN), a wide area network (WAN), or a global area network (e.g., the Internet).

According to the teachings of the present invention, a runtime environment applet is invoked on ICC 208 upon receipt of a command from an application 212
5 executing on a host system 202 which identifies at least one code file and one data file from the discrete code and data files 218. Unlike prior art smart card implementations wherein the bytecodes and data necessary to implement a runtime environment applet were saved as a single file and implemented by the runtime environment, innovative smart card 208 includes an innovative file system 216
10 which facilitates sharing of discrete code and data files. It will be appreciated, based on the description to follow, that the innovative file system facilitates modification to ICC functionality without the need to modify the data stored on the ICC.

Card reader 106 provides a necessary interface between ICC 208 and a
15 computing system such as, e.g., host system 202. Card readers are typically designed to support any of a number of standardized communication protocols supported within the smart card community and, in this way, can typically accommodate smart cards adhering to any of the recognized communication standards from any smart card manufacturer. In this regard, card reader 206 is not
20 chip- or card-specific. For purposes of this discussion, card reader 206 includes the necessary hardware and software resources required to support the interlaced debug protocol of the present invention. Consequently, card reader 206 is merely intended to be illustrative of card readers typically known within the art.

For ease of explanation, and not limitation, host system 202 is depicted
25 within Fig. 2 as comprising a plurality of executable applications 212 and an operating system 210, as shown. According to one aspect of the present invention,

to be described more fully below, host system 202 may well include an ICC application development agent as one or more of applications 212. The ICC development tool includes a compiler to translate a single source code file into a discrete code file and a data file for storage on ICC 208. In addition, development
5 tool includes a file system builder, which takes a description of the code and data files to be provided on ICC 208, and generates a binary image of a file system which is loaded into the non-volatile memory of ICC 208 to build the file system. It is to be appreciated, then, that the innovative development agent described below facilitates the innovative features of ICC 208. When endowed with the innovative
10 development agent, host system 202 may well be utilized in association with communication medium 204, card reader 206 and innovative ICC 208 as an application development system. Further reference to an application development system throughout this application is intended to reference data network 200.

15 **Example Computer System**

In the discussion herein, the invention is described in the general context of computer-executable instructions, such as program modules, being executed by one or more conventional computers. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or
20 implement particular abstract data types. Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, personal digital assistants, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers, and the like. In a
25 distributed computer environment, program modules may be located in both local and remote memory storage devices.

Fig. 3 shows a general example of a computer system 202 incorporating the teachings of one aspect of the present invention, and suitable for use within data network 200. It will be evident, from the discussion to follow, that host system 202 is intended to represent any of a class of general or special purpose computing platforms which, when endowed with the innovative application development agent, transforms data network 200 into an application development system. In this regard, the following description of computer system 202 is intended to be merely illustrative, as computer systems of greater or lesser capability may well be substituted without deviating from the spirit and scope of the present invention.

As shown, host system 202 includes one or more processors or processing units 132, a system memory 134, and a bus 136 that couples various system components including the system memory 134 to processors 132.

The bus 136 represents one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. The system memory includes read only memory (ROM) 138 and random access memory (RAM) 140. A basic input/output system (BIOS) 142, containing the basic routines that help to transfer information between elements within host system 202, such as during start-up, is stored in ROM 138. Host system

202 further includes a hard disk drive 144 for reading from and writing to a hard disk, not shown, a magnetic disk drive 146 for reading from and writing to a removable magnetic disk 148, and an optical disk drive 150 for reading from or writing to a removable optical disk 152 such as a CD ROM, DVD ROM or other such optical media. The hard disk drive 144, magnetic disk drive 146, and optical disk drive 150 are connected to the bus 136 by a SCSI interface 154 or some other suitable bus interface. The drives and their associated computer-readable media

provide nonvolatile storage of computer readable instructions, data structures, program modules and other data for host system 202. Although the exemplary environment described herein employs a hard disk 144, a removable magnetic disk 148 and a removable optical disk 152, it should be appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, random access memories (RAMs) read only memories (ROM), and the like, may also be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk 144, magnetic disk 148, optical disk 152, ROM 138, or RAM 140, including an operating system 158, one or more application programs 160 including, for example, the innovative application development agent 120, other program modules 162, and program data 164. A user may enter commands and information into host system 202 through input devices such as keyboard 166 and pointing device 168. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are connected to the processing unit 132 through an interface 170 that is coupled to bus 136. A monitor 172 or other type of display device is also connected to the bus 136 via an interface, such as a video adapter 174. In addition to the monitor 172, personal computers often include other peripheral output devices (not shown) such as speakers and printers.

As shown, host system 202 operates in a networked environment using logical connections to one or more remote computers, such as a remote computer 176. The remote computer 176 may be another personal computer, a personal digital assistant, a server, a router or other network device, a network "thin-client" PC, a peer device or other common network node, and typically includes many or

all of the elements described above relative to host system 202, although only a memory storage device 178 has been illustrated in Fig. 3.

As shown, the logical connections depicted in Fig. 3 include a local area network (LAN) 180 and a wide area network (WAN) 182. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet. In one embodiment, remote computer 176 executes an Internet Web browser program such as the "Internet Explorer" Web browser manufactured and distributed by Microsoft Corporation of Redmond, Washington to access and utilize online services.

When used in a LAN networking environment, host system 202 is connected to the local network 180 through a network interface or adapter 184. When used in a WAN networking environment, host system 202 typically includes a modem 186 or other means for establishing communications over the wide area network 182, such as the Internet. The modem 186, which may be internal or external, is connected to the bus 136 via a serial port interface 156. In a networked environment, program modules depicted relative to the personal host system 202, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

Generally, the data processors of host system 202 are programmed by means of instructions stored at different times in the various computer-readable storage media of the computer. Programs and operating systems are typically distributed, for example, on floppy disks or CD-ROMs. From there, they are installed or loaded into the secondary memory of a computer. At execution, they are loaded at least partially into the computer's primary electronic memory. The invention described herein includes these and other various types of computer-readable storage media

when such media contain instructions or programs for implementing the innovative steps described below in conjunction with a microprocessor or other data processor. The invention also includes the computer itself when programmed according to the methods and techniques described below. Furthermore, certain sub-components of the computer may be programmed to perform the functions and steps described below. The invention includes such sub-components when they are programmed as described. In addition, the invention described herein includes data structures, described below, as embodied on various types of memory media.

For purposes of illustration, programs and other executable program components such as the operating system are illustrated herein as discrete blocks, although it is recognized that such programs and components reside at various times in different storage components of the computer, and are executed by the data processor(s) of the computer.

Fig. 4 illustrates a block diagram of an example ICC development agent 120, suitable for use in host system 202. As shown, development agent 120 comprises 106 comprises control logic 402, one or more development application(s) (or tools) 404, an ICC command set 406, an ICC compiler 408 and a file system builder 410, coupled as depicted.

Control logic 402 intended to represent any of a broad range of logic known in the art. In one implementation, control logic 402 a processor, while in alternate embodiments control logic is a microcontroller, a programmable logic array, or a series of executable instructions which perform logic functions. Control logic 402 communicates with ICC 208 in any of a plurality of standard communication protocols. In alternate embodiments, non-standard protocols may well be used to communicate between controller 402 and ICC 208 such as, for example, a unique development communication protocol. Although not specifically denoted, it is to be

appreciated that controller 402 communicates with ICC 208, and any other peripheral for that matter, via the communication resources of operating system 210 of host system 202. Insofar as such resources are well known in the art, they need not be described further here.

5 According to the illustrated example embodiment, development agent 202 is depicted as including one or more development application(s) or tools 404. These tools may well be any of a number of application development tools commonly known in the art. That is, application development agent 120 may well be utilized with any of a number of development applications such as, for example, Visual
10 Basic or Visual C/C++ application development tools available from Microsoft Corporation of Redmond, WA. Moreover, such applications 404 need not be integrated with development agent 120. Rather, agent 120 may well receive source code developed using an external application development tool without deviating from the spirit and scope of the present invention. It is to be appreciated that by
15 using common software development tools such as those described above, it is to be appreciated that the innovative smart card application development system 200 does not require the chip-specific, often proprietary software development application and associated compilers, linkers and debuggers that are typical of the prior art ICC application development systems.

20 According to one aspect of the present invention, development agent 120 includes an innovative ICC applet compiler 408. As shown, the ICC applet compiler 408 is comprised of a parser 412 and one or more translator(s) 414. The translators 414 take source code developed using, for example, one of development applications 404, and translates it into a lower-level, executable form, e.g., runtime
25 environment bytecodes or assembly language instructions. It is common to employ two or more translator(s) in a compiler, one as a front-end compiler to receive and

translate the source code to an intermediate level language, and a back-end translator to translate the intermediate level code into an executable form acceptable to the processor which will ultimately execute the applet. The use of translator(s) in compilers is well-known and, as a result, need not be further described here.

5 In addition to translator(s) 414, ICC compiler 408 includes a parser 412. As used herein, the parser 412 analyzes the received code, in either source code, intermediate level, or executable form and separates the executable instructions from the data. More specifically, in accordance with the teachings of the present invention, parser 412 separates the code from the data and saves each in a separate
10 and independent file. It is to be appreciated that a runtime environment applet created by the innovative ICC applet compiler 408 consists of at least two files, one code file and one data file. **{Inventors, please modify/supplement as appropriate}**

 In addition to the innovative compiler 408, development agent 120 includes
15 a file system builder 410. As shown, file system builder 410 includes binary image generator 416. As alluded to above, binary image generator 416 receives a description of a file system and generates a binary image of the file system description. The file system description is an ordered series of commands that describe and build the file system. An example subset of the commands used to
20 create a file system description are provided below, in **Table I**.

Partition_size n: Sets the size of the file system partition to n bytes.

25 **Num_FCB n:** Sets the number of file control blocks created in file system to n.

Num_ACL n: Sets the number of access control lists in the created file system to n.

5 **Sector_size**: sets the sector size of the file system in bytes. This is the number of bytes that are added to a file each time it needs more space. The larger n is, the more unused space there may be in files but the more quickly you can access them and the less overhead space they require. The smaller n is, the more tightly the data in the file fits the allocated space, but there is more overhead in managing the file.

10 **Target** [x86/8051/AVR]: Sets the target to accommodate either the "x86", "8051" or "AVR" processing environments.

Create_Partition: creates a partition within the file system and populates it with a default file and a default access control level.

15 **FILE filename ACL Aclfilename**: creates a file with the given file name whose access control rules are in the file with the given ACL file name.

20 **DELETE filename** (or directory): deletes a named file or directory.

KP_Data {GroupUids} Protocol {ProtocolData}: Put data that describes a known principal into the current file which must be a file in /s/k {INVENTORS, PLEASE ELABORATE}

25 **ACL_Data ResourceOperationIndex ExpresionType** {BooleanExpression}: Add the given access control rule to the current file.

Numeric_Data i1 i2 i3...in

30 **Numeric_Data_At** Position=i1 i2 i3...in: this pair of commands enter numeric data into the current file. The first version enters the data at the current position in the file and the second version sets the current position before beginning entry.

ASCII_Data CharacterString

35 **ASCII_Data_At** Position=CharacterString: this pair of commands enter ASCII encoded data into current file. The first version enters the data at the current position, while the second version sets the current position before beginning entry at the current position.

40 **Unicode_Data** Characterstring

Unicode_Data_At Characterstring: this pair of commands enter UNICODE encoded alphanumeric data into the current file. The first version enters the data at the current position, while the second version sets the current position before beginning entry.

Set_File_ACL FileName AclFileName: sets the access control level of the file by the given filename.

5 **Set_File_Size** Filename *n*: sets the size of the file by the given filename to the given value in bytes.

10 **END**: terminates reading of the file system description commands by the file system builder and invokes the binary image generator to output a binary image of the file system.

Table I: Example File System Description Syntax and Definitions

It should be noted that although reference is made to “filenames” in the above syntax, this is for ease of explanation only, as other indicators of a file may well be used. Examples of suitable file descriptors include, without limitation, file names,
15 file handles, and the like.

According to one implementation, the file system description is supplied to file system builder 410 by control logic 402, and includes a list of code files and data files required to provide an ICC with certain functionality. In one embodiment, ICC development agent 120 provides a graphical user interface (not shown) to a
20 user with a list of available code and data files, enabling the user to dynamically create a file system description in a high-level, graphical representation. Based on the description received from the user, control logic 402 accesses ICC file system command set 406 which includes, at least, the file system syntax identified in **Table I** to generate the file system description.

25 In an alternate embodiment, one or more applications 404 provide control logic 402 with the file system description based on functionality requirements or the input of a developer using a higher-level language.

Once the file system description is received, file system builder 410 invokes the binary image generator 416 to generate a binary image of the received file
30 system description. According to one implementation, the binary image generated

from the received file system description is downloaded to non-volatile memory (e.g., EEPROM) of an innovative IC card 208. In an alternate embodiment, the binary image is provided to a mass-producer of IC cards, which burns (or masks) the image on a read-only memory (ROM) device for the IC card. In either case, file
5 system builder 410 provides an IC card (208) with the ability to uniquely access (add, delete, modify) and execute code files and data files independently to implement a flexible array of runtime environment applets.

As alluded to above, ICC file system command set 406 is a library of functional commands which control logic 402 utilizes to create and/or communicate
10 with the file system 216 of an IC card incorporating the teachings of the present invention. More specifically, the ICC file system command set 406 provides control logic 402 with the vocabulary required to create, delete, access and execute the discrete code and data files 116 of ICC 208. Although ICC file system command set 406 is depicted as a separate functional block, this is for ease of
15 illustration and explanation. It will be appreciated that ICC file system command set 406 may well be integrated with other functional elements such as, for example, control logic 402 without deviating from the spirit and scope of the present invention.

According to one implementation, control logic 402 communicates with file
20 system 216 using the innovative file system command set in accordance with a standard communication protocol such as, for example, International Standards Organisation (ISO) 7816 T=0, or T=1.

Although depicted as a separate functional elements, those skilled in the art will appreciate that compiler 408 and/or file system builder 410 may well be
25 integrated within control logic 402. Accordingly, the teachings of the present

invention may well be practiced with variation from the exemplary embodiment without deviating from the spirit and scope of the present invention.

Example Integrated Circuit Card

5 Fig. 5 illustrates a block diagram of an innovative integrated circuit card 208 incorporating the teachings of the present invention in greater detail. As shown, IC card 208 includes the I/O port 102, runtime environment 112, non-volatile and volatile memory (106 and 108) of prior art IC cards. In addition, ICC 208 includes control logic 502, operating system with native functions 504, each modified to
10 accommodate the innovative ICC file system 216 and a plurality of discrete code files and data files 506-518.

As used herein, control logic 502 is intended to represent any of a number control means known in the art, such as those described in association with control logic 102. However, such control logic is modified, as necessary, to recognize and
15 implement instructions from the innovative file system command set. In this regard, control logic 502 enables a host system to access or execute discrete code and data files 506-518 via the operating system 504 and the ICC file system 216. Similarly, operating system 504 is modified only to the extent necessary to accommodate ICC file system 216 and the discrete code and data files 506-518. An
20 example of a suitable file system is the Smart Card for Windows operating system commonly available from Microsoft Corporation, of Redmond, WA.

As introduced above, to implement a runtime applet in ICC 208, control logic 502 receives an Execute command from a host denoting a code file and a data file. According to one embodiment of the present invention, the received command
25 is in the form of an application protocol data unit (APDU). An example APDU is graphically illustrated with brief reference to Fig. 6.

As shown, Fig. 6 graphically illustrates an application protocol data unit suitable for use in accordance with the present invention, to communicate file system command set instructions between a host system 202 and an innovative ICC 208, according to one embodiment of the present invention. As shown, APDU 600 is comprised of a mandatory header 602, a conditional body 604, and a mandatory trailer 606. The mandatory header includes a class byte 608, instruction byte 610, and parameter bytes 612 and 614. The conditional body includes a length field 616, which denotes the number of bytes in the data field, and the number of bytes expected in any response. The data field 618 includes the data, if any, transmitted in the APDU. The mandatory trailer field 606 is comprised of status bytes 620 and 622, respectively.

According to the teachings of the present invention, a host system 202 implements a runtime environment applet within ICC 208 by issuing an EXECUTE command of the form:

Execute (code_filename,data_filename) (1)

As shown, a runtime environment applet executed in accordance with the teachings of the present invention requires both a code filename and a data filename. As shown in Fig. 6, the present invention provides for different combinations of code and data files, thereby enabling a code file to share data files, and for a code file to use multiple data files, without the need to integrate the content of the data file into a single applet file.

Example Operation

Fig. 7 is a flow chart of an example method for compiling a runtime environment applet using a development agent incorporating the teachings of the present invention, according to one aspect of the present invention. For ease of explanation, and not limitation, the method of Fig. 7 will be developed with
5 continued reference to Fig.'s 1-6.

Turning to Fig. 7, the method begins with step 702, wherein the innovative ICC applet compiler 408 receives the source code to be compiled. More specifically, a development application (e.g., 404) provides control logic 402 of development agent 120 with a file containing source code in a high-level
10 programming language, which must be compiled to an executable form for use in an IC card, e.g., ICC 208.

According to one implementation, ICC applet compiler 408 analyzes the received source code to parse data segments from bytecode segments, step 704. As described above, parser 412 receives the source code, identifies data objects within
15 the source code, and separates the data objects from the executable bytecodes. Each data object is assigned a relative location in the data file. A reference to this relative location is inserted to the code file that is being generated. In the second pass of the compiler, it decides on the absolute addresses of each data object and generates the data file accordingly. At the same time, it replaces all the data objects
20 references in the code file with actual addresses.

In step 706, the bytecode and data objects are passed to the translator(s), as they are translated into an executable form. More specifically, the bytecode and data objects of the applet are translated into a form suitable for execution by the control logic 502 of the IC card 208. In this regard, compiler 408 is chip-specific
25 although it is anticipated that translator(s) 412 for control logic suitable for IC card applications may well be provided within compiler 408.

Although the illustrated example embodiment invokes the parsing step 704 before the translation step 706, those skilled in the art will appreciate that there may be advantages to reversing this order. That is, it may be more convenient to first translate the received source code to some intermediate-level, compiler language.

5 One common language is the static single assignment (SSA) form, which has the inherent property that reoccurring variables (i.e., local variables within a method) are uniquely identified within the SSA form. Accordingly, it may prove computationally easier to translate the received source code to an intermediate-level language, parse the code from the data, and then perform a back-end translation
10 down to executable form. In another embodiment, it the entire translation step(s) may be completed, wherein the code is parsed from the data while in executable form. Regardless, all such variations are anticipated within the scope and spirit of the present invention.

In step 708, ICC applet compiler 408 generates two files from the received
15 source code, one each for the bytecode (i.e., the code file) and for data (i.e., the data file). More specifically, once the parsing and translation steps have been completed, the executable code is saved in a discrete code file, while the data is saved in a discrete data file. In this way, data files may be shared across code files providing for more flexible implementations.

20 Turning now to Fig. 8, the operation of the innovative file system builder 410 will be described, according to one aspect of the present invention. As shown, the method begins with step 802, wherein the file system builder 410 receives a file system description. As described above, in accordance with one example embodiment, the file system description is generated by control logic 402 based on
25 received user (developer) input and the ICC file system command set 406 described with reference to Table I.

The received file system description is read, step 804, and a binary image of the file system is created, step 806. As described above, binary image generator 416 reads the ordered series of commands describing the file system, and generates a binary image of the file system to create and implement the file system.

5 In step 808, the binary image created in step 806 is loaded into the non-volatile memory of a suitable integrated circuit card such as, for example, ICC 208. According to one embodiment of the present invention, the created binary image representation of the file system is loaded into the non-volatile memory 106 of ICC 208 from control logic 402 of development agent 120. In an alternate embodiment,
10 the binary image representation of the file system is stored by control logic 402 in an accessible storage medium, and is masked (burned) into read-only memory (ROM) during the manufacture of ICC 208.

Fig. 9 is a flow chart illustrating the method steps of executing a runtime environment applet on the innovative ICC of Fig. 5, in accordance with the
15 teachings of the present invention. As shown, the method begins in step 902 when IC card 208 receives a command to invoke a runtime environment applet. More specifically, control logic 502 receives a command in the form EXECUTE (code_filename,data_filename) via I/O port 102, and invokes an instance of runtime environment 214 to execute the applet defined by the identified code file and data
20 file. With reference to Fig. 5, for purposes of illustration, assume that codefile1 and datafile3 are designated. Accordingly, the command EXECUTE (codefile1,datafile3) is received by control logic 502. It should be appreciated, given the scope of the discussion, that any of a number of alternate means may be used to invoke an applet and/or application in accordance with the teachings of the
25 present invention. In one implementation, for example, the activation of the applets (and the selection of the code and data file) can be achieved by an implicit

command such as "Execute" or be explicitly selected by an event (true some sort of a translation/dispatching table).

In step 904, controller 402 passes the received file names (codefile1,datafile3) to file system 216 to retrieve the files from non-volatile
5 memory 106. In step 906, the identified code file and data file are retrieved and loaded into the runtime environment (RTE) 214, and the identified code file (codefile1) is executed until reference to required data is reached, step 908. In step 910, the RTE accesses the identified data file (datafile3) and performs the desired operation in the data file.

10 In step 912, a determination of whether the end of the applet has been reached. If, after performing the operation in the data file, the code file has additional executable code, the process continues with step 908 and the bytecode is executed until another reference to a data file operation is reached. If, however, in step 912 the end of the executable code of the identified code file is reached, the
15 applet ends, and any updates to the identified data file (datafile3) are made.

Fig. 10 is a block diagram of an example storage medium having stored thereon a plurality of executable instructions including instructions which, when executed, implement the development agent of the present invention, according to an alternate embodiment of the present invention. In general, Fig. 10 illustrates a
20 storage medium/device 1000 having stored thereon a plurality of instructions 1002 including at least a subset of which that, when executed, implement the innovative features of development agent 120 of the present invention. When executed by a processor of a host system, the executable instructions implementing development agent 120 perform the compiling and file system building functions described
25 above.

As used herein, storage medium 1000 is intended to represent any of a number of storage devices and/or storage media known to those skilled in the art such as, for example, volatile memory devices, non-volatile memory devices, magnetic storage media, optical storage media, and the like. Similarly, the executable instructions are intended to reflect any of a number of software languages known in the art such as, for example, C, C++, Visual Basic, Java, Smalltalk, Lisp, eXtensible Markup Language (XML), and the like. Moreover, it is to be appreciated that the storage medium/device 1000 need not be co-located with any host system. That is, storage medium/device 1000 may well reside within a remote server communicatively coupled to and accessible by an executing system. Accordingly, the software implementation of Fig. 10 is to be regarded as illustrative, as alternate storage media and software embodiments are anticipated within the spirit and scope of the present invention.

Although the invention has been described in language specific to structural features and/or methodological steps, it is to be understood that the invention defined in the appended claims is not necessarily limited to the specific features or steps described. Rather, the specific features and steps are disclosed as preferred forms of implementing the claimed invention.

CLAIMS

1. An integrated circuit card (ICC) comprising:
a storage device having stored thereon one or more code files and one or
5 more data files; and
control logic to implement an ICC runtime environment to execute an applet
in response to a command identifying a code file and a data file.
2. An ICC according to claim 1, further comprising:
10 a file system, employed by the runtime environment, to access and retrieve
the identified code file and data file from the storage device for use in
implementing the applet in the runtime environment.
3. A storage medium having stored thereon a plurality of executable
15 instructions which, when executed, implement the file system of claim 2.
4. An ICC according to claim 1, wherein a data file may be invoked with
multiple code files to implement different runtime environment applets.
- 20 5. An ICC according to claim 1, wherein a code file may be invoked with
multiple data files to implement different runtime environment applets.
6. An ICC according to claim 1, wherein the command identifying the
code file and the data file is received from a host system.

7. An ICC application development system including the ICC of claim 1.

8. An ICC according to claim 1, wherein a runtime environment applet is defined by a code file and a data file.

5

9. An ICC according to claim 8, wherein an applet is executed in response to an Execute instruction that contains an indication to the code file and that data file that needs to be executed and/or to an internal or external event that indirectly indicates the code file and data file to be executed.

10

10. An integrated circuit card (ICC) comprising:
an operating system; and
a file system, responsive to the operating system, to add, delete, modify and execute discrete code files and data files.

15

11. An integrated circuit card according to claim 10, further comprising:
a runtime environment, responsive to the operating system, to interface with the file system to execute a runtime environment applet.

12. An integrated circuit card according to claim 11, wherein the runtime environment selectively invokes one or more code files and one or more data files to implement the runtime environment applet.
- 5 13. An integrated circuit card according to claim 11, wherein the runtime environment applet is invoked in response to receiving a command from a host identifying one or more code files and one or more data files.
- 10 14. An integrated circuit card according to claim 11, wherein an applet is executed the code file and the data file are executed in response to a command received from a host system via the operating system.
- 15 15. An integrated circuit card according to claim 10, wherein the code files and the data files implement one or more runtime environment applets.
- 16 16. An integrated circuit card according to claim 10, wherein the file system facilitates modification in integrated circuit functionality without modifying data files.
- 20 17. An integrated circuit card according to claim 10, wherein the file system facilitates addition and deletion of code files independent of data files.
- 25 18. An integrated circuit card application development system comprising a computer system communicatively coupled to the integrated circuit card of claim 10.

19. An integrated circuit readable storage medium having stored thereon a plurality of executable instructions to implement the file system of claim 10.

20. A method for compiling a runtime environment applet for an integrated circuit card (ICC), the method comprising:
5 receiving source code for the applet; and
segregating executable bytecode from data into a separate code file and data file.

10 21. A method according to claim 20, further comprising the step of:
translating the bytecode and data into an executable form.

22. A method according to claim 20, wherein the steps of segregating and translating are reversed.

15 23. A method according to claim 20, wherein the steps are implemented by an applet compiler of a ICC application development system.

24. A storage medium having stored thereon a plurality of executable
20 instructions which, when executed, implement the method step of claim 20.

25. A method comprising:
receiving a description of a file system for an integrated circuit card (ICC);
and
25 generating a binary image of the received file system description.

29

26. A method according to claim 25, further comprising:
loading the binary image into a non-volatile memory of the ICC.

27. A method according to claim 26, wherein the binary image is
5 downloaded to an ICC from a development system according to a standard
communication protocol.

28. A method according to claim 26, wherein the binary image is masked
into a read-only memory of the ICC during ICC manufacture.

10

29. A development system comprising a development agent which
performs a method according to claim 25.

30. A storage medium having stored thereon a plurality of executable
15 instructions which, when executed, implement a method according to claim 25.

31. A method for developing a runtime environment applet for execution
by an integrated circuit card (ICC), the method comprising:
receiving a high-level source code representation of the applet;
20 compiling the received source code into at least a code file and a data file;
and
generating a binary image of a file system, including at least the code file
and the data file for storing on the ICC.

32. A method according to claim 31, wherein the step of compiling comprises:

analyzing the received source code;

5 parsing executable bytecodes from data objects to store the bytecodes in the code file and the data objects in the data file; and

translating the code file and the data file to lower-level language executable by control logic of the ICC.

33. A method according to claim 31, wherein the step of compiling
10 comprises:

translating the received source code to at least an intermediate level representation;

analyzing the received source code in the at least intermediate level representation;

15 parsing executable bytecodes from data objects;

storing the bytecodes in the code file and the data object in the data file; and

translating the code file and the data file from the intermediate level language to a lower level language executable by control logic of the ICC.

20 34. A method according to claim 31, wherein generating a binary image of a file system comprises:

generating an ordered series of commands representing a received file system description;

reading the ordered series of commands; and

25 generating a binary image of the ordered series of commands representing the file system.

35. A method according to claim 34, wherein generating an ordered series of commands comprises:

receiving the file system description from a development application in a
5 high-level script form;

accessing a file system command set; and

translating the high-level script form of the file system description into an ordered series of commands utilizing the file system command set.

10 36. A method according to claim 31, further comprising:
loading the generated binary image into the ICC.

37. A method according to claim 36, wherein the step of loading comprises:

15 downloading the binary image to non-volatile memory of the ICC from a host system using a standard communication protocol.

38. A method according to claim 36, wherein the step of loading comprises:

20 masking the binary image into a non-volatile memory during a manufacture process of the ICC.

39. A storage medium having stored thereon a plurality of executable instructions which, when executed, implement a method according to claim 31.

40. A method for executing a runtime environment applet in an integrated circuit card (ICC) comprising the steps of:

receiving a command at the ICC to execute an identified code file and an identified data file;

5 accessing a file system to retrieve and load the identified code file and data file; and

executing the code file through completion, performing operations in the data file called for by the executing code.

10 41. A method according to claim 40, wherein the command is received from a host system in response to inserting the ICC into a card reader.

42. A method according to claim 40, further comprising:

15 receiving a second command to execute the identified code file with a different identified data file; and

accessing the file system to retrieve and load the different identified data file; and

executing the code file through completion, performing operations in the different data file called for by the executing code.

20

43. A method according to claim 40, further comprising:

receiving a second command to execute a different identified code file with the identified data file;

accessing and retrieving the different identified code file; and

25 executing the different identified code file through completion, performing operations in the identified data file called for by the executing code.

44. A compiler, to receive source code for a runtime environment applet in a high-level language from a development tool and to generate an executable form of the applet consisting of at least a code file and a data file.

5

45. A storage medium having stored thereon a plurality of executable instructions which, when executed, implement a compiler according to claim 44.

46. A development system comprising a compiler according to claim 44.

10

47. A file system builder to receive an ordered series of commands for a file system and to generate a binary image of the file system to store in a non-volatile memory of an integrated circuit card.

15

48. A storage medium having stored thereon a plurality of executable instructions which, when executed, implement a file system builder according to claim 47.

20

49. A development system comprising:
an application development tool; and
a compiler, to receive source code for a runtime environment applet in a high-level language from the development tool and to generate an executable form of the applet consisting of at least a code file and a data file.

50. A development system according to claim 49, further comprising:

a file system builder to receive an ordered series of commands for a file system and to generate a binary image of the file system to store in a non-volatile memory of an integrated circuit card.

Fig. 5

208


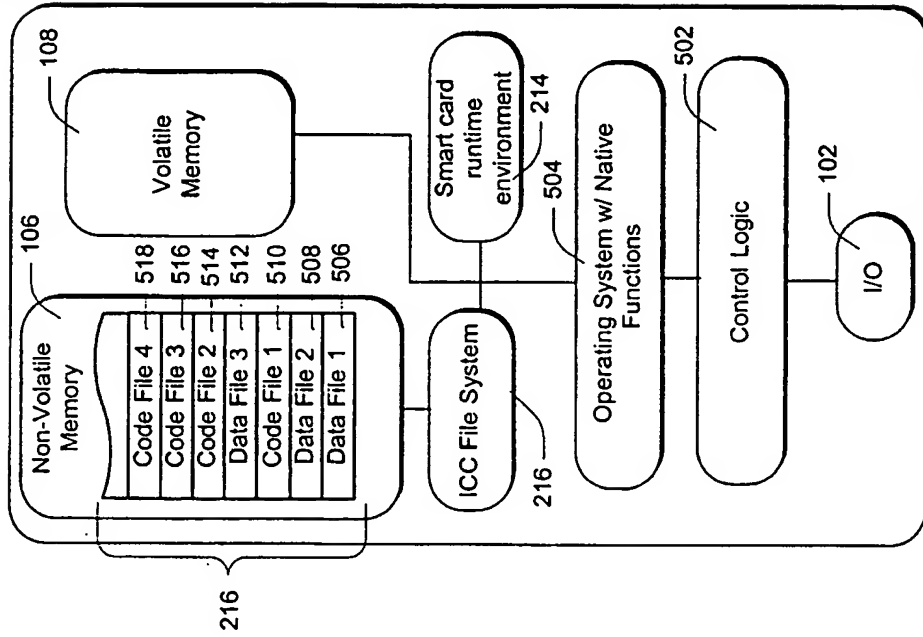


Fig. 1

100

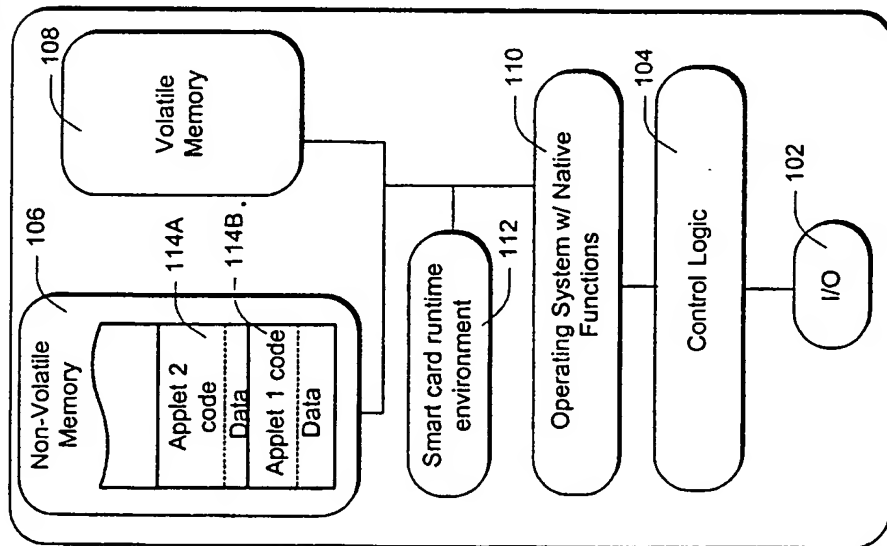

Prior Art

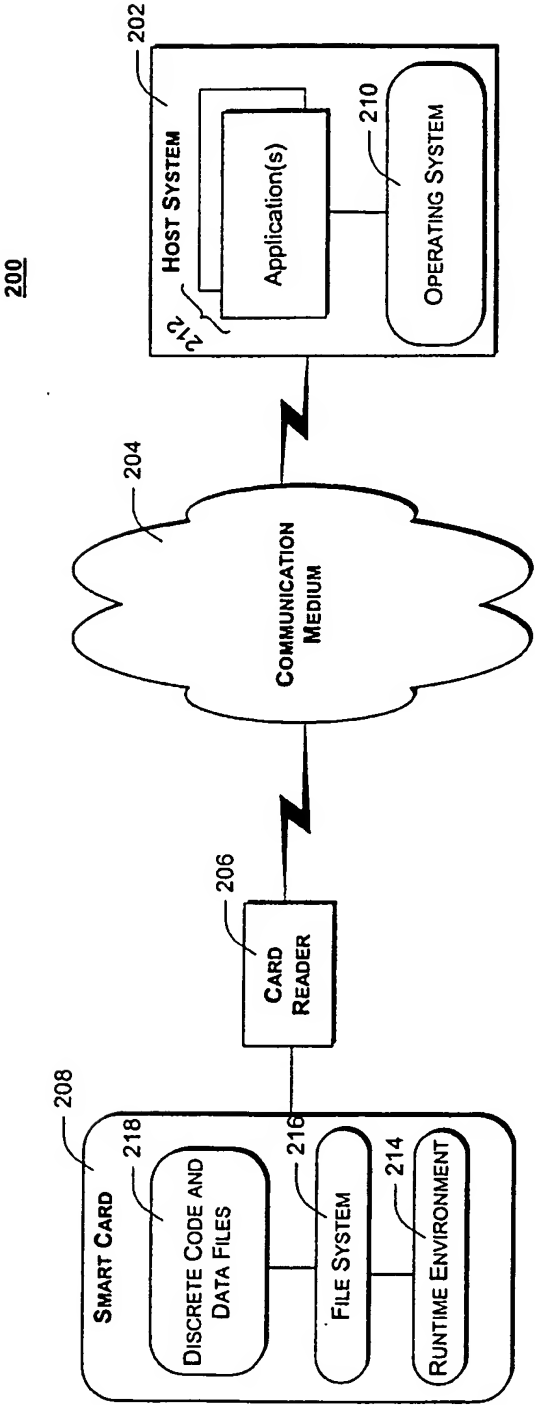


Fig. 2

Fig. 3

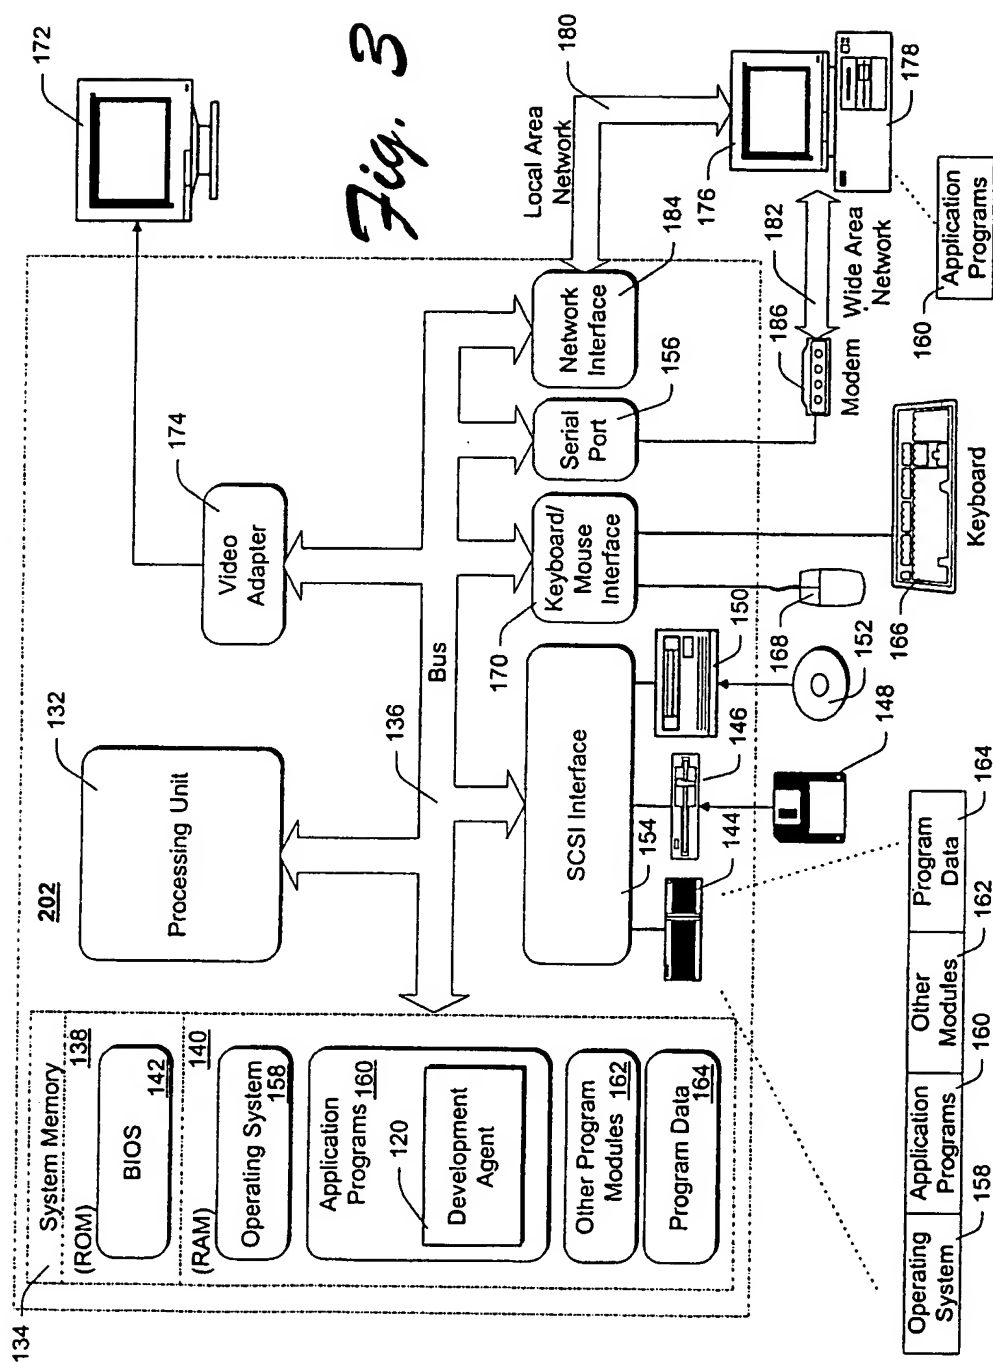


Fig. 4

120

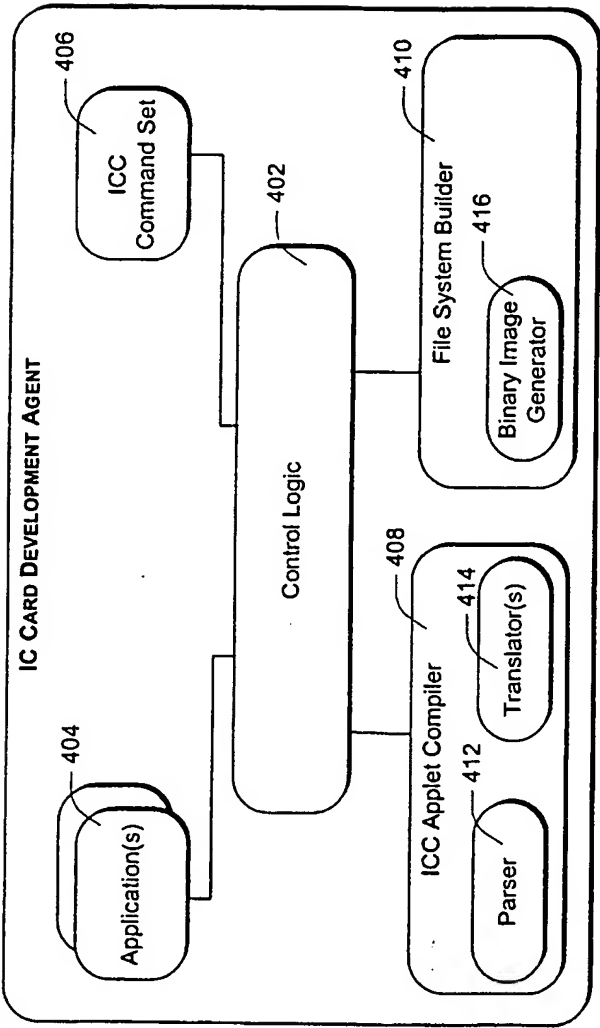


Fig. 6

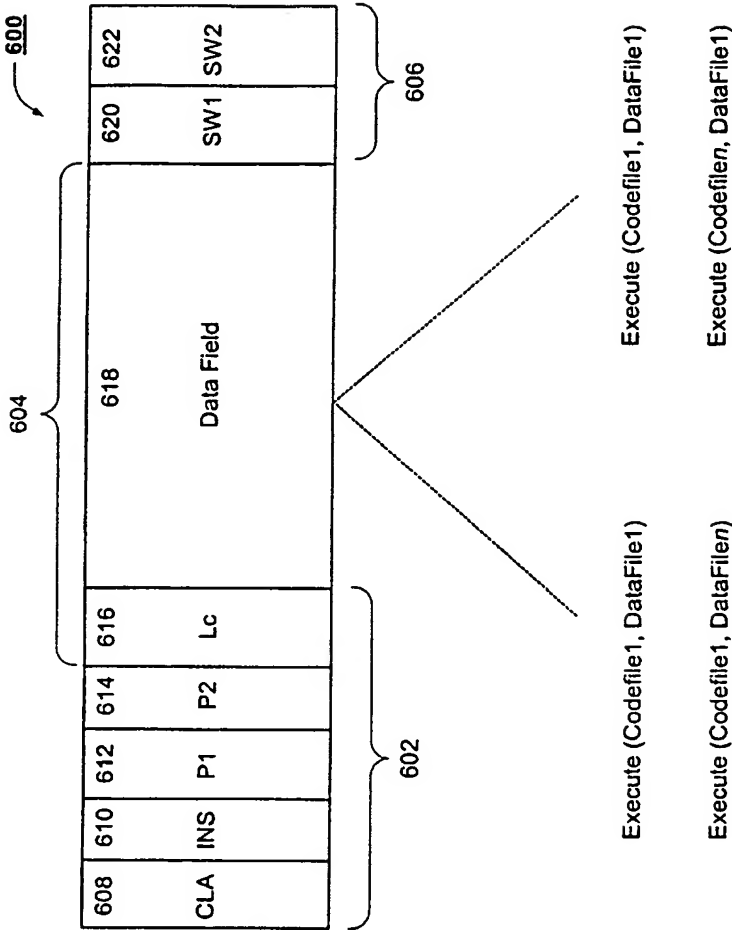
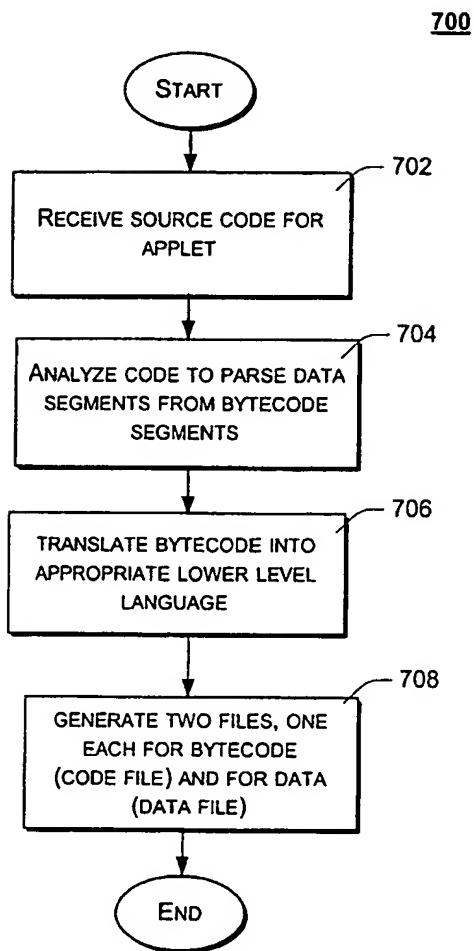
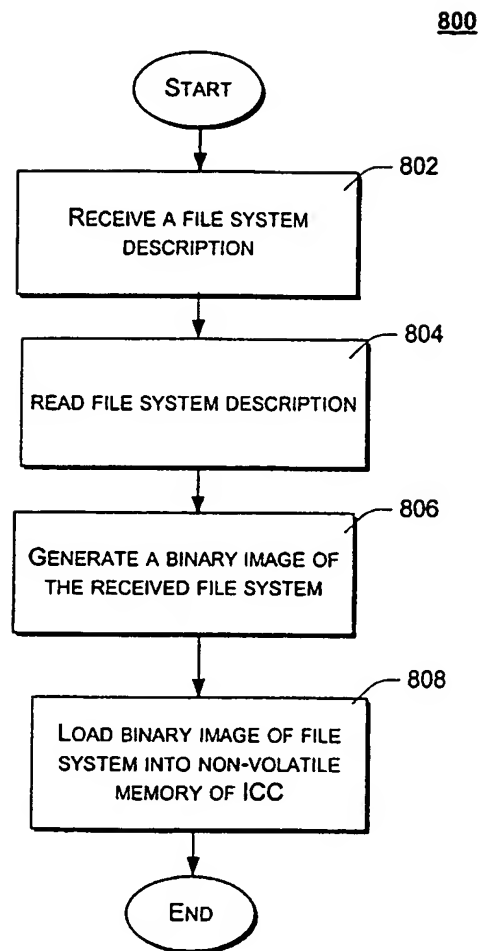
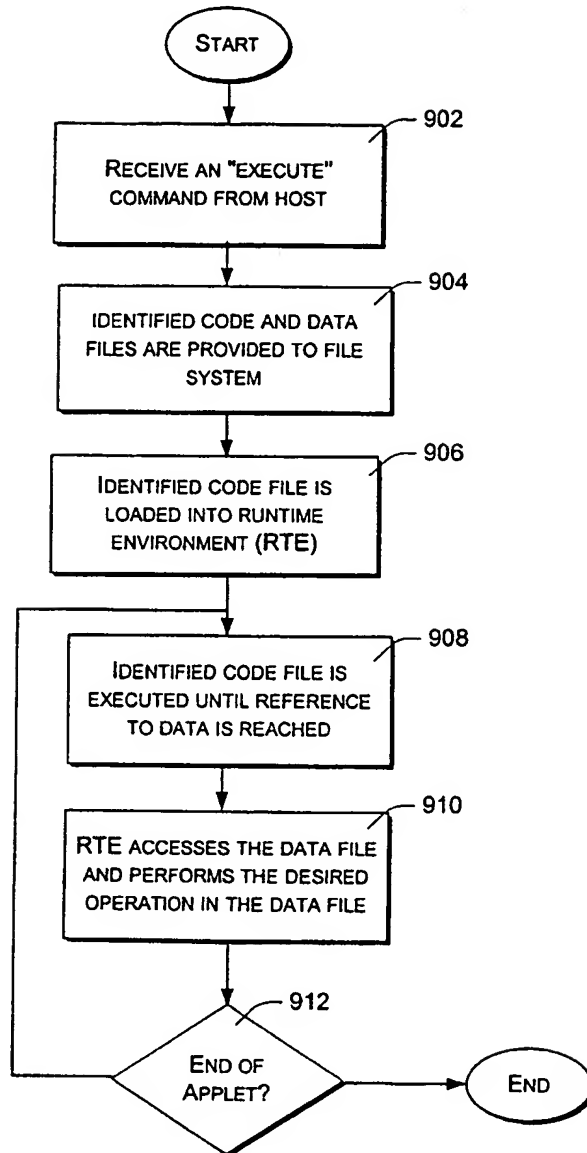



Fig. 7*Fig. 8*

7/8

*Fig. 9*900

8/8

Fig. 10

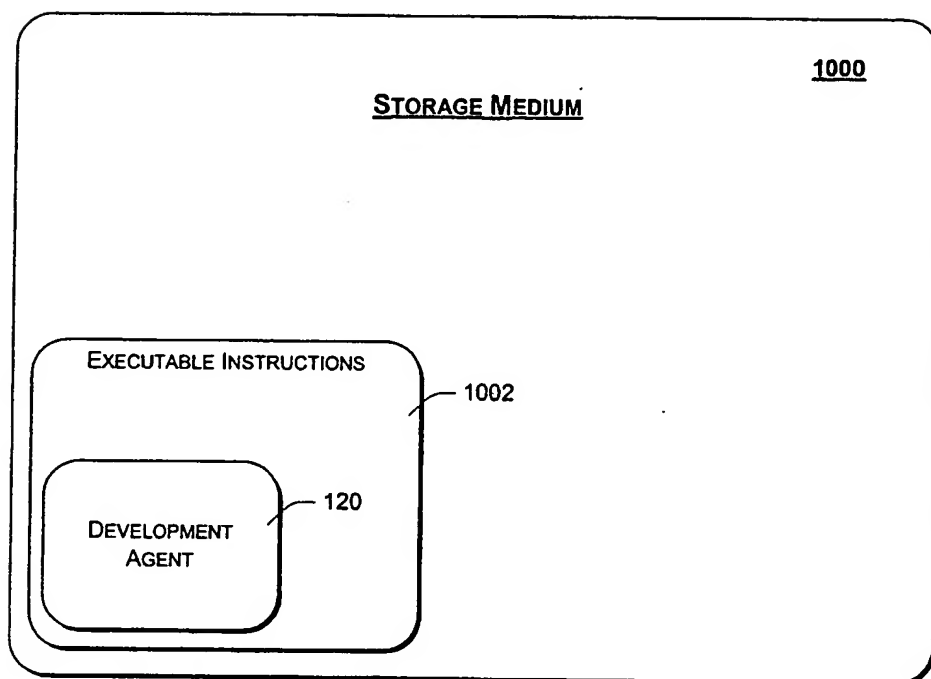

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/12932

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 G07F7/10		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 G07F G06F H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) WPI Data, EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 09257 A (GEMPLUS) 5 March 1998 (1998-03-05) abstract; claims; figures page 2, line 20 -page 7, line 8 page 10, line 6 -page 23, line 7	1-3, 6-41, 44-50
A	EP 0 466 969 A (SIEMENS NIXDORF INFORMATIONSSYSTEME) 22 January 1992 (1992-01-22) abstract; claims; figures column 3, line 3 - line 50	1-6, 8-17, 40-43
A	EP 0 190 733 A (TOSHIBA) 13 August 1986 (1986-08-13) the whole document	1, 3, 10, 40
-/-		
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">2 October 2000</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">10/10/2000</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">David, J</div>

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/12932

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92 13322 A (GEMPLUS CARD INTERNATIONAL) 6 August 1992 (1992-08-06)	
A	WO 98 43212 A (VISA INTERNATIONAL SERVICE ASSOCIATION) 1 October 1998 (1998-10-01)	
A	WO 98 19237 A (SCHLUMBERGER TECHNOLOGIES) 7 May 1998 (1998-05-07)	
A	WO 98 52160 A (MONDEX INTERNATIONAL) 19 November 1998 (1998-11-19)	
A	EP 0 292 248 A (THE GENERAL ELECTRIC COMPANY) 23 November 1988 (1988-11-23)	
A, P	EP 0 949 595 A (CITICORP DEVELOPMENT CENTER) 13 October 1999 (1999-10-13)	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/12932

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9809257	A	05-03-1998	US 5923884 A	13-07-1999
			AU 4842897 A	19-03-1998
			CA 2233217 A	05-03-1998
			EP 0858644 A	19-08-1998
EP 0466969	A	22-01-1992	AT 100229 T	15-01-1994
			DE 59004248 D	24-02-1994
			US 5293577 A	08-03-1994
EP 0190733	A	13-08-1986	JP 61177585 A	09-08-1986
			DE 3684932 A	27-05-1992
WO 9213322	A	06-08-1992	FR 2673476 A	04-09-1992
			DE 69205425 D	16-11-1995
			DE 69205425 T	21-03-1996
			EP 0589884 A	06-04-1994
			ES 2082451 T	16-03-1996
			JP 6504862 T	02-06-1994
			US 5473690 A	05-12-1995
WO 9843212	A	01-10-1998	AU 6578698 A	20-10-1998
			EP 1004992 A	31-05-2000
			EP 1021801 A	26-07-2000
			US 6005942 A	21-12-1999
WO 9819237	A	07-05-1998	AU 722463 B	03-08-2000
			AU 4911897 A	22-05-1998
			EP 0932865 A	04-08-1999
WO 9852160	A	19-11-1998	AU 6299698 A	09-09-1998
			AU 7776798 A	08-12-1998
			AU 7776898 A	08-12-1998
			AU 7776998 A	08-12-1998
			AU 7777098 A	08-12-1998
			AU 7777198 A	08-12-1998
			AU 7777298 A	08-12-1998
			AU 7777398 A	08-12-1998
			AU 7777498 A	08-12-1998
			EP 0963580 A	15-12-1999
			EP 0981807 A	01-03-2000
			EP 0985202 A	15-03-2000
			EP 0985203 A	15-03-2000
			EP 0976114 A	02-02-2000
			EP 0985204 A	15-03-2000
			EP 0981805 A	01-03-2000
			WO 9837526 A	27-08-1998
			WO 9852158 A	19-11-1998
			WO 9852159 A	19-11-1998
			WO 9852161 A	19-11-1998
			WO 9852152 A	19-11-1998
			WO 9852162 A	19-11-1998
			WO 9852163 A	19-11-1998
			WO 9852153 A	19-11-1998
EP 292248	A	23-11-1988	GB 2204973 A	23-11-1988
			AU 1643488 A	24-11-1988
			JP 1064033 A	09-03-1989
			NO 882140 A	21-11-1988

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/12932

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 292248 A		ZA 8803412 A	22-02-1989
EP 0949595 A	13-10-1999	BR 9901213 A	11-01-2000
		JP 11345266 A	14-12-1999